


# 1. Inverters for general purpose

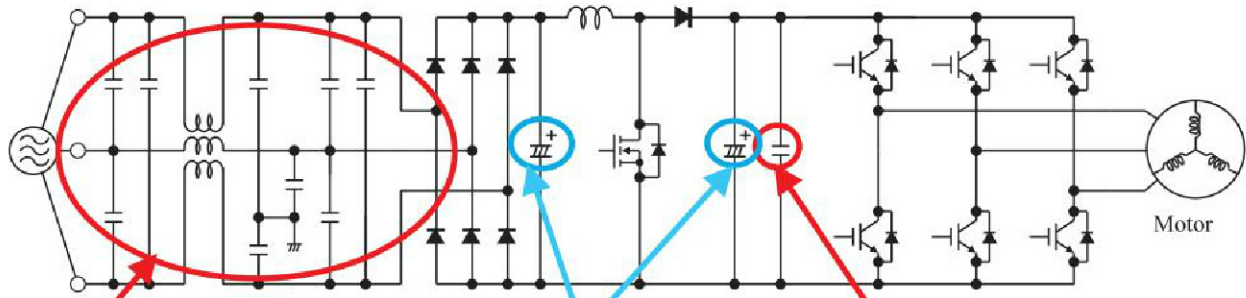

For AC Line Filter  
Film Capacitor

**MPCA** series

For Smoothing Cap.  
Aluminum Capacitor

**VXK·VXS** series  
**LSU·LSA·LSC** series

For Snubber circuit  
Film Capacitor

**MPC** series




Conveyor belt



Elevator



Robot arm



Press machines

## Inverter

Film Capacitor  
Miniaturized, LowNoise

**MPCA** series

Temp.Range : - 25 ~ + 70°C  
Volt/Cap. : 220 ~ 500Vac/1~100µF

LowESR , HighRippleCurrent

**MPC** series

Temp.Range : - 40 ~ + 85°C  
Volt/Cap : 700 ~ 1,600Vdc/0.1~2.2µF



Aluminum Capacitor ScrewTerminal

**LSU** series 85°C5,000h

Volt:350~580Vdc  
Cap.:1,200~18,000µF

**LSA** series 85°C20,000h

Volt:350~450Vdc  
Cap.:1,800~15,000µF

**LSC** series 105°C5,000h

Volt:350~450Vdc  
Cap.:1,800~15,000µF



Aluminum Capacitor  
105°C 5000h, Miniaturized

**VXK** series

Volt:400~450Vdc  
Cap.:120~1,200µF

● Multi Terminal Type



[ SN ]



[ EN ]



[ LN ]



[ BN ]



Aluminum Capacitor  
Specified the endurance of  
100million times charge-Discharge


**VXS** series

Temp./Life:105°C 5,000hours

VoltRange :315~450Vdc  
Cap.Range :82~1,000µF



# 2. Stepper motor

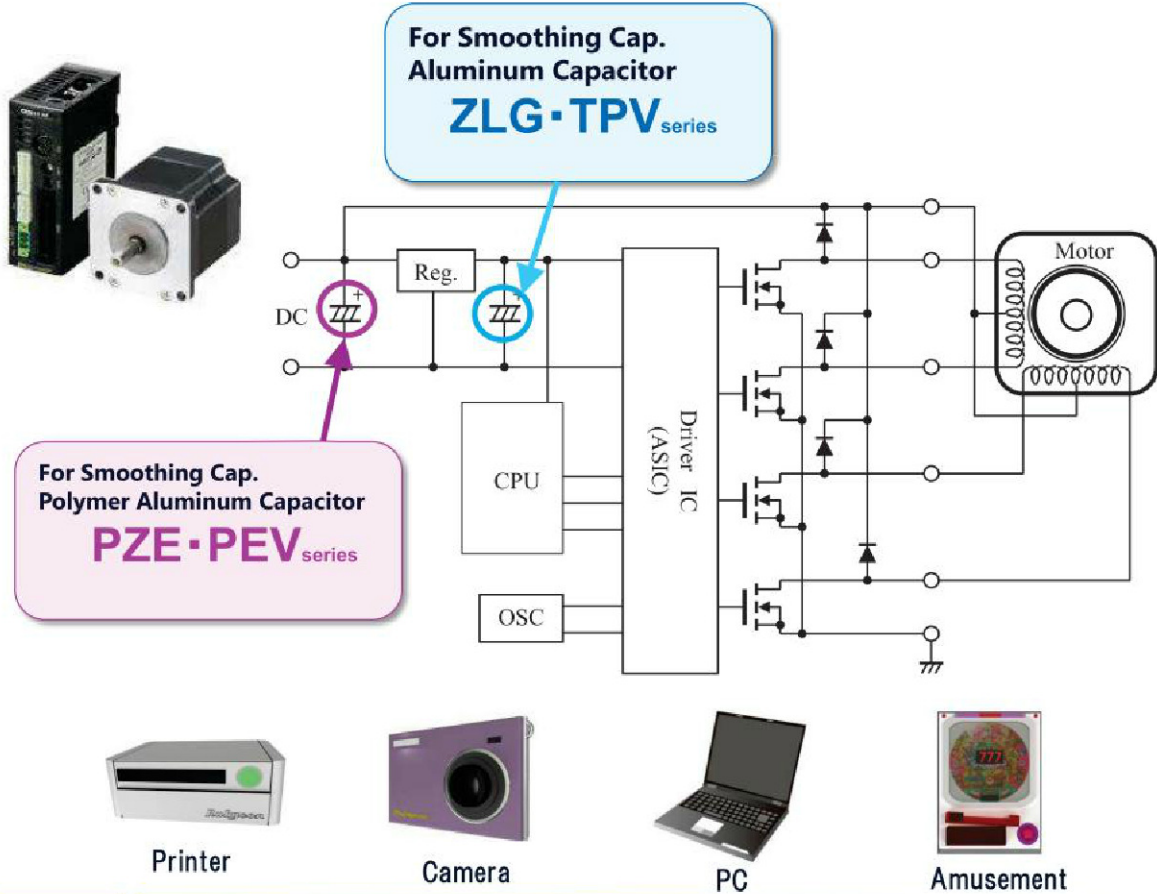

## Stepper motor

Conductive Polymer Aluminum Capacitor  
105°C LowESR, HighRippleCurrent

**PZE series**

Temp./Life: -55~105°C / 10,000hours  
Volt/Cap. : 25~63Vdc / 33~330µF



Aluminum Capacitor  
Miniaturized, Low Impedance

**ZLG series**

Temp./Life: 105°C / 1,000~5,000hours  
Volt/Cap. : 6.3~35Vdc / 4.7~3,900µF



Conductive Polymer Aluminum Capacitor  
105°C LowESR, HighRippleCurrent, SMD

**PEV series**

Temp./Life: -55~105°C / 10,000hours  
Volt/Cap. : 25~63Vdc / 10~330µF



Aluminum Capacitor  
Miniaturized, Low Impedance

**TPV series**

Temp./Life: 105°C / 2,000hours  
Volt/Cap. : 6.3~35Vdc / 68~2,200µF

